

Natural Image Coding in V1: How Much Use is Orientation Selectivity?

Jan Eichhorn, Fabian Sinz and Matthias Bethge*
 Max Planck Institute for Biological Cybernetics
 Tübingen, Germany

October 16, 2008

Abstract

Orientation selectivity is the most striking feature of simple cell coding in V1 which has been shown to emerge from the reduction of higher-order correlations in natural images in a large variety of statistical image models. The most parsimonious one among these models is linear Independent Component Analysis (ICA), whereas second-order decorrelation transformations such as Principal Component Analysis (PCA) do not yield oriented filters. Because of this finding it has been suggested that the emergence of orientation selectivity may be explained by higher-order redundancy reduction. In order to assess the tenability of this hypothesis, it is an important empirical question how much more redundancies can be removed with ICA in comparison to PCA, or other second-order decorrelation methods. This question has not yet been settled, as over the last ten years contradicting results have been reported ranging from less than five to more than hundred percent extra gain for ICA. Here, we aim at resolving this conflict by presenting a very careful and comprehensive analysis using three evaluation criteria related to redundancy reduction: In addition to the multi-information and the average log-loss we compute, for the first time, complete rate-distortion curves for ICA in comparison with PCA. Without exception, we find that the advantage of the ICA filters is surprisingly small. We conclude that orientation selective receptive fields in primary visual cortex cannot be explained in the framework of linear redundancy reduction. Furthermore, we show that a simple spherically symmetric distribution with only two parameters can fit the data even better than the probabilistic model underlying ICA. Since spherically symmetric models are agnostic with respect to the specific filter shapes, we conclude that orientation selectivity is unlikely to play a critical role for redundancy reduction even if the class of transformations is not limited to linear ones.

Author Summary

What is the computational goal underlying the response properties of simple cells in primary visual cortex? Since the Nobel prize winning work of Hubel and Wiesel we have known that orientation selectivity is an important feature of simple cells in V1. A conclusive and quantitative explanation for the actual purpose of this biological structure, however, still remains

*Corresponding Author

elusive. Among the hypotheses on its purpose, the idea of redundancy reduction (Barlow, 1959) stands out in being formalized precisely in terms of a quantitative objective function. While it has been reported previously that orientation selectivity can reduce the redundancy in the representation of color images by more than 100%, we here provide strong evidence that the actual gain is only 3% for both color and gray value images. Thus, our results challenge the conception that the major goal of orientation selective coding in V1 is redundancy reduction. Furthermore, we now have a reliable reference point for quantitative investigations of nonlinear early vision models.

Introduction

It is a long standing hypothesis that neural representations in sensory systems are adapted to the statistical regularities of the environment [1; 2]. Despite widespread agreement that neural processing in the early visual system must be influenced by the statistics of natural images, there are many different viewpoints on how to precisely formulate the computational goal the system is trying to achieve. At the same time, different goals might be achieved by the same optimization criterion or learning principle. Redundancy reduction [2], the most prominent example of such a principle, can be beneficial in various ways: it can help to maximize the information to be sent through a channel of limited capacity [3], it can be used to learn the statistics of the input [4] or to facilitate pattern recognition [5].

Besides redundancy reduction, a variety of other interesting criteria such as *sparseness* [6; 7], *temporal coherence* [8], or *predictive information* [9; 10] have been formulated. An important commonality among all these ideas is the tight link to density to density estimation of the input signal. Redundancy reduction, in particular, can be interpreted as a special form of density estimation where the goal is to find a mapping which transforms the data into a representation with statistically independent coefficients. This idea is related to projection pursuit [11] where density estimation is carried out by optimizing over a set of possible transformations in order to match the statistics of the transformed signal as good as possible to a pre-specified target distribution. Once the distribution has been matched, applying the inverse transformation effectively yields a density model for the original data. From a neurobiological point of view, we may interpret the neural response properties as an implementations of such transformations. Accordingly, the redundancy reduction principle can be seen as special case of projection pursuit where the target distribution is assumed to have independent marginal distributions. This renders it a very general principle.

A crucial aspect of this kind of approach is the class of transformations over which to optimize. From a statistician's point of view it is important to choose a regularized function space in order to avoid overfitting. On the other hand, if the class of possible transformations is too restricted, it may be impossible to find a good match to the target distribution. From a visual neuroscientist's point of view, the choice of transformations should be related to the class of possible computations in the early visual system.

Intriguingly, a number of response properties of visual neurons have been reproduced by optimizing over the class of linear transformations on natural images for redundancy reduction (for a review see [12; 13]). For instance, Buchsbaum and Gottschalk revealed a link between the second-order statistics of color images and opponent color coding of retinal ganglion cells by demonstrating that decorrelating natural images in the trichromatic color space with Principal

Component Analysis (PCA) yields the luminance, the red-green, and the blue-yellow channel [14]. Atick and Redlich derived the center-surround receptive fields by optimizing a symmetric decorrelation transformation [15]. Later, also spatio-temporal correlations in natural images or sequences of natural images were linked to the receptive field properties in the retina and the lateral geniculate nucleus (LGN) [16; 17; 18].

On the way from LGN to primary visual cortex, orientation selectivity emerges as a striking new receptive field property. A number of researchers [e.g. 19; 20] have used the covariance properties of natural images to derive linear basis functions that exhibit similar properties. Decorrelation alone, however, was not sufficient to achieve this goal. Rather, additional constraints were necessary, such as spatial locality or symmetry.

It was not until the reduction of higher-order correlations were taken into account that the derivation of localized and oriented band-pass filters—resembling orientation selective receptive fields in V1—was achieved without the necessity to assume any further constraints. Those filters were derived with Independent Component Analysis (ICA), a generalization of Principal Component Analysis (PCA), which in addition seeks to reduce all higher-order correlations [7; 21].

This finding suggests that the orientation selectivity of V1 simple cells may be *explained* by the minimization of higher-order correlations. But in order to test this hypothesis, one must also demonstrate that those filters can yield a substantial advantage for redundancy reduction. If this is not the case, the objective of redundancy reduction does not seem to be critical for the emergence of orientation selectivity in primary visual cortex.

The importance of such a *quantitative* assessment has already been pointed out in earlier studies [22; 23; 24; 25; 26; 13]. In particular, a direct quantification of the redundancy reduction achieved with ICA and PCA for natural images has been carried out in [22; 23; 24; 26] but they differ considerably in their conclusions regarding the effect of higher-order correlations in linear image models ranging from less than five to more than hundred percent.

This is a very unsatisfying situation as even for the simplest class of models—the linear case—the literature does not provide a clear answer to the question of how important orientation selectivity may be for the reduction of redundancy in natural images. In order to resolve this issue, we carried out this comprehensive study which exclusively investigates *linear* image models that have been around for more than a decade by now. Our goal is to establish a reliable reference against which more sophisticated image models can be compared to in the future. We elaborate on our own previous work [26] by using an optimized ICA algorithm on the color image data set for which the largest higher-order redundancy reduction has been reported previously. The advantage of the resulting orientation selective ICA filters is tested comprehensively with three different types of analysis that are related to the notion of redundancy reduction and coding efficiency: (A) multi-information reduction, (B) average log-likelihood, and (C) rate-distortion curves. Since we put strong emphasis on the reproducibility and verifiability of our results, we provide our code and the dataset online (<http://www.kyb.tuebingen.mpg.de/bethge/code/QICA/>).

Our results show that orientation selective ICA filters do not excel in any of these measures: We find that the gain of ICA in redundancy reduction over a random decorrelation method is only about 3% for color and gray-value images. In terms of rate-distortion curves, ICA performs even worse than PCA. Furthermore, we demonstrate that a simple spherically symmetric model with only two parameters fits the data significantly better. Since in this model the specific shape of the filters is ignored, we conclude that it is unlikely that orientation selectivity plays a critical

role for redundancy reduction even if the class of transformations is not limited to linear ones.

Material and Methods

An important difficulty in setting up a quantitative comparison originates from the fact that it bears several issues that may be critical for the results. In particular, choices have to be made regarding the *evaluation criteria*, the *image data*, the *estimation methods*, regarding which *linear transformations* besides ICA to be included in the comparison, and which *particular implementation of ICA* to be used. The significance of the outcome of the comparison will therefore depend on how careful these choices have been made and the most relevant issues will be addressed in the following.

Notation and Nomenclature

For both, color and gray-value data, we write $\mathbf{x}$ to refer to single vectors which contain the raw pixel intensities. Vectors are indicated by bold font while the same letter in normal font with a subindex denotes one of its components. Vectors without subindices usually denote random variables, while subindices indicate specific examples. In some cases it is convenient to define the corresponding data matrix $X = (\mathbf{x}_1, \dots, \mathbf{x}_N)$ which holds single images patches in its columns. The letter N denotes the number of examples in the dataset, while n is used for the dimension of a single data point.

Transformations are denoted by W , oftentimes with a subindex to distinguish different types. The result of a transformation to either a vector $\mathbf{x}$ or a data matrix X will be written as $\mathbf{y} = W\mathbf{x}$ or $Y = WX$, respectively.

Probability densities are denoted with the letters p and q , sometimes with a subindex to indicate differences between distributions whenever it seems necessary for clarity. In general, we use the hat symbol to distinguish between true entities and their empirical estimates. For instance, $p_{\mathbf{y}}(\mathbf{y}) = p_{\mathbf{x}}(W^{-1}\mathbf{y}) \cdot |\det W|^{-1}$ is the true probability density of $\mathbf{y}$ after applying a fixed transformation W , while $\hat{p}_{\mathbf{y}}(\mathbf{y})$ refers to the corresponding empirical estimate.

A distribution $p(\mathbf{y})$ is called *factorial*, or *marginally independent*, if it can be written as a product of its marginals, i.e. $p(\mathbf{y}) = \prod_{i=1}^n p_i(y_i)$ where $p_i(y_i)$ is obtained by integrating $p(\mathbf{y})$ over all components but y_i .

Finally, the expectation over some entity f with respect to $\mathbf{y}$ is written as $\mathbb{E}_{\mathbf{y}}[f(\mathbf{y})] = \int p(\mathbf{y})f(\mathbf{y})d\mathbf{y}$. Sometimes, we use the density instead of the random variable in the subindex to indicate the distribution, over which the expectation is taken. If there is no risk for confusion we drop the subindex. Just as above, the empirical expectation is marked with a hat symbol, i.e. $\hat{\mathbb{E}}[f(\mathbf{y})] = \frac{1}{N} \sum_{k=1}^N f(\mathbf{y}_k)$.

How to compare early vision models?

A principal complicacy in low-level vision is the lack of a clearly defined task. Therefore, it is difficult to compare different image representations as it is not obvious *a priori* what measure should be used.

(A) Multi-Information The first measure we consider is the *multi-information* [27], which is the true objective function that is minimized by ICA over the choice of filters W . The multi-information assesses the total amount of statistical dependencies between the components y_i of a filtered patch $\mathbf{y} = W\mathbf{x}$:

$$I[p(\mathbf{y})] = D_{\text{KL}} \left[p(\mathbf{y}) \parallel \prod_j p_j(y_j) \right] = \mathbb{E}_p \left[\log \frac{p(\mathbf{y})}{\prod_j p_j(y_j)} \right] = \sum_{j=1}^n h[p_j(y_j)] - h[p(\mathbf{y})]. \quad (1)$$

The terms $h[p_j(y_j)]$ and $h[p(\mathbf{y})]$ denote the marginal and the joint entropies of the true distribution, respectively. The *Kullback-Leibler-Divergence* or *Relative Entropy*

$$D_{\text{KL}}[p||q] = \mathbb{E}_p \left[\log \frac{p(\mathbf{y})}{q(\mathbf{y})} \right]$$

is an information theoretic dissimilarity measure between two distributions p and q [28]. It is always non-negative and zero if and only if p equals q . If the redundancy reduction hypothesis is taken literally, the multi-information is the right measure to minimize, since it measures how close to factorial the true distribution of the image patches in the representation $\mathbf{y}$ really is.

The application of linear ICA algorithms to ensembles of natural images very reliably yields transformations consisting of localized and oriented bandpass filters similar to the receptive fields of neurons in V1. It is less clear, however, whether these filter properties also critical to the minimization of the multi-information, i.e. the redundancy? In order to assess the tenability of the idea that a V1 simple cell is adjusted to the purpose of redundancy reduction, it is important to know whether such a tuning can—in *principle*—result in a large reduction of the multi-information. One way to address this question is to measure *how much* more the multi-information is actually reduced by the ICA filters in comparison to others such as PCA filters. This approach has been taken in [26].

One problem with estimating multi-information is that it involves the joint entropy $h[p(\mathbf{y})]$ of the true distribution which is generally very hard to estimate. In certain cases, however, the problem can be bypassed by evaluating the difference in the multi-information between two representations $\mathbf{x}$ and $\mathbf{y}$. In particular, if $\mathbf{y}$ is related to $\mathbf{x}$ by the linear transformation $\mathbf{y} = W\mathbf{x}$ it follows from definition (1) and the transformation theorem for probability densities

$$p_{\mathbf{y}}(\mathbf{y}) = p_{\mathbf{x}}(\mathbf{x}) \left| \det \left(\frac{\partial \mathbf{y}}{\partial \mathbf{x}} \right) \right|^{-1} = p_{\mathbf{x}}(W^{-1}\mathbf{y}) \cdot |\det W|^{-1}$$

that difference in multi-information can be expressed as

$$\begin{aligned} I[p(\mathbf{y})] - I[p(\mathbf{x})] &= \sum_k h[p_k(y_k)] - h[p(\mathbf{y})] - \left(\sum_k h[p_k(x_k)] - h[p(\mathbf{x})] \right) \\ &= \sum_k h[p_k(y_k)] - \sum_k h[p_k(x_k)] - \log |\det W|. \end{aligned}$$

For convenience, we chose a volume-conserving gauge [26] where all linear decorrelation transforms are of determinant one, and hence $\log |\det W| = 0$. This means that differences in multi-information are equal to differences of marginal entropies which can be estimated robustly.

Thus, our empirical estimates of the multi-information differences are given by:

$$\Delta I \approx \sum_k h[\hat{p}_k(y_k)] - \sum_k h[\hat{p}_k(x_k)] \quad s.t. \quad |\det(W)| = 1 \quad (2)$$

For estimating the entropy of the univariate marginal distributions, we employ the OPT estimator introduced in [26] which uses the exponential power family to fit the marginal distributions by searching for the OPTimal exponent. This estimator has been shown to give highly reliable results for natural images. In particular, it is much more robust than entropy estimators based on the sample kurtosis which easily overestimate the multi-information.

(B) Average Log Loss (ALL) As mentioned earlier, redundancy reduction can be interpreted as a special form of density estimation where the goal is to find a mapping which transforms the data into a representation with statistically independent coefficients. This means that any given transformation specifies a density model over the data. Our second measure, the average log-loss (ALL), evaluates the agreement of this density model with the actual distribution of the data:

$$\mathbb{E}_p[-\log \hat{p}(\mathbf{y})] = - \int p(\mathbf{y}) \log \hat{p}(\mathbf{y}) d\mathbf{y} = H[p] + D_{\text{KL}}[p||\hat{p}] \quad (3)$$

The average log-loss is a principled measure quantifying how different the model density $\hat{p}(\mathbf{y})$ is from the true density $p(\mathbf{y})$ [29]. Since the KL-divergence is positive and zero if and only if $\hat{p} = p$ the ALL is minimal only if $\hat{p}$ matches the true density. Furthermore, differences in the average log-loss correspond to differences in the coding cost (i.e. information rate) in the case of sufficiently fine quantization. For natural images, different image representations have been compared with respect to this measure in [22; 23; 24].

For the estimation of the average log-loss, we follow Lewicki *et al.* [22; 30] (We are referring here to the first method in the cited references. The defining equation there contains an extra term $N \log \sigma$ which indicates the role of noise. Note, however, that this term has only a symbolic meaning as the noise is assumed to be independent of the representation so that this term can in fact be ignored) by simply using the empirical average

$$\mathbb{E}_p[-\log \hat{p}(\mathbf{y})] \approx \hat{\mathbb{E}}_{\mathbf{y}}[-\log \hat{p}(\mathbf{y})] = -\frac{1}{N} \sum_{k=1}^N \log \hat{p}(\mathbf{y}_k). \quad (4)$$

While this estimator in principle can be prone to overfitting, we control for this risk by evaluating all estimates on an independent test set, whose data has not been used during the parameter fit. Furthermore, we compare the average log-loss to the parametric entropy estimates $h[\hat{p}]$ that we use in (A) for estimating the multi-information changes (see Eq. 2). The difference between both quantities has been named *differential log-likelihood* [31] and can be used to assess the goodness of fit of a model distribution:

$$\hat{\mathbb{E}}[-\log \hat{p}] - h[\hat{p}] = \mathbb{E}_{\hat{p}}[\log \hat{p}] - \hat{\mathbb{E}}[\log \hat{p}].$$

The shape of the parametric model is well matched to the actual distribution if the differential log-likelihood converges to zero with increasing number of data points.

(C) Rate-Distortion Curves Finally, we consider *efficient coding* or *minimum mean square error reconstruction* as a third objective. In contrast to the previous objectives, it is now assumed that there is a bottleneck, limiting the amount of information that can be transmitted, and the goal is to maximize the amount of *relevant* information transmitted about the image. In the context of neural coding, the redundancy reduction hypothesis has oftentimes been motivated in terms of coding efficiency. In fact, instead of minimizing the multi-information one can equivalently ask for the linear transformation W which maximizes the mutual information between its input $\mathbf{x}$ and its output $W\mathbf{x} + \xi$ when additive noise ξ is added to the output [32; 33]. It is important to note, however, that this minimalist approach of “information maximization” is ignorant with respect to how useful or *relevant* the information is that has been transmitted [12].

For natural images, the source signal $\mathbf{x}$ is a continuous random variable which requires infinitely many bits to be specified with unlimited precision. If there is an information bottleneck, however, only a limited amount of bits can be transmitted. Both, the multi-information and the average log-loss do not take into account the problem what information should be encoded and what information can be discarded. Therefore, a representation optimized only for redundancy reduction can in fact perform quite poorly with respect to the goal of preserving the *relevant* information during the transmission [26; 34; 35]. In order to compare two different representations with respect to this more complete notion of coding efficiency, it is necessary to have a measure for the quality with which a signal can be reconstructed from the information that is preserved by the representation. This objective is in fact very much related to the task of image compression.

Clearly, we expect that the criteria for judging image compression algorithms may not provide a good proxy to an accurate judgement of what information is considered relevant in a biological vision system. In particular, the existence of selective attention suggests that different aspects of image information are transmitted at different times depending on the behavioral goals and circumstances [13]. That is, a biological organism can change the relevance criteria dynamically on demand while for still image compression algorithms it is rather necessary that this assessment is made once and forever in a fixed and static fashion.

The issue of selective attention is outside the scope of this paper. Striving for simplicity instead, we will use the mean squared reconstruction error for the pixel intensities. This is the measure of choice for high-rate still image compression [36]. In particular, it is common to report on the performance of a code by determining its rate-distortion curve which specifies the required information rate for a given reconstruction error (and vice versa) [35]. Consequently, we will ask for a given information rate, how do the image representations compare with respect to the reconstruction error. As result, we will obtain a so-called rate-distortion curve which displays the average reconstruction error as a function of the information rate or vice versa. The second method used in [22; 30] is an estimate of a single point on this curve for a particular fixed value of the reconstruction error.

The estimation of the rate-distortion curve is clearly the most difficult task among the three criteria. We adopt the framework of transform coding [34] extensively used in still image compression, which divides the encoding task into two steps: First, the image patches $\mathbf{x}$ are linearly transformed into $\mathbf{y} = W\mathbf{x}$. Then the coefficients y_j are quantized independently of each other. Using this framework, we can ask whether the use of an ICA image transformation leads to a smaller reconstruction error after coefficient quantization than PCA or any other transform.

As for quantizing the coefficients, we resort to the framework of variable rate entropy coding [37]. In particular, we apply uniform quantization, which is close to optimal for high-rate compression [38; 34]. For uniform quantization, it is only required to specify the bin width of the coefficients. There is also the possibility to use a different number of quantization levels for the different coefficients. The question of how to set these numbers is known as the ‘bit allocation problem’ because the amount of bits needed to encode one coefficient will depend monotonically on the number of quantization levels. The number of quantization levels can be adjusted in two different but equivalent ways: One possibility is to use a different bin width for each individual coefficient. Alternatively, it is also possible to use the same bin width for all coefficients and multiply all coefficients with an appropriate scale factor before quantization. The larger the variance of an individual coefficient, the more bits will be allocated to represent it.

Here, we will employ the latter approach, for which the bit allocation problem becomes an inherent part of the transformation: Any bit allocation scheme can be obtained via post-multiplication with a diagonal matrix. Thus, in contrast to the objective function of ICA, the rate–distortion criterion is not invariant against post-multiplication with a diagonal matrix. For ICA and PCA, we will determine the rate–distortion curve for both, normalized output variances (“white ICA” and “white PCA”) and normalized basis functions (“normalized ICA” and “orthonormal PCA”), respectively.

Decorrelation transforms

The particular shape of the ICA basis functions is obtained by minimization of the multi-information over all invertible linear transforms $\mathbf{y} = W\mathbf{x}$. In contrast, the removal of second-order correlations alone generally does not yield localized, oriented, and bandpass image basis functions. ICA additionally removes higher-order correlations which are generated by linear mixing. In order to assess the importance of this type of higher-order correlations for redundancy reduction and coding efficiency we will compare ICA to other decorrelating image bases.

Let $C = \mathbb{E}[\mathbf{x}\mathbf{x}^\top]$ be the covariance matrix of the data and $C = UDU^\top$ its eigen-decomposition. Then, any linear second-order decorrelation transform can be written as

$$W = D_2 \cdot V \cdot D^{-1/2} \cdot U^\top \quad (5)$$

where D and U are defined as above, V is an arbitrary orthogonal matrix and D_2 is an arbitrary diagonal matrix. It is easily verified that $Y = WX$ has diagonal covariance for all choices of V and D_2 , i.e. all second-order correlations vanish. This means that any particular choice of V and D_2 determines a specific decorrelation transform. Based on this observation we introduce a number of linear transformations for later reference. All matrices are square and are chosen to be of determinant λ^m , where m is the number of columns (or rows) of W (i.e. $\lambda = \sqrt[m]{\prod \lambda_i}$ is the geometrical mean of the eigenvalues $\lambda_i, i = 1, \dots, m$).

Orthogonal principal component analysis (oPCA)

If the variances of the principle components (i.e. the diagonal elements of D) are all different, PCA is the only metric-preserving decorrelation transform and is heavily used in digital image coding. It corresponds to choosing $V = I_m$ as the identity matrix and $D_2 = \lambda D^{1/2}$, such that $W_{\text{oPCA}} = \lambda U^\top$.

White principal component analysis (wPCA)

Equalizing the output variances in the PCA representation sets the stage for the derivation of further decorrelation transforms different from PCA. In order to assess the effect of equalization for coding efficiency, we also include this “white PCA” representation into our analysis: Choose $V = I_m$ as for orthonormal PCA and then set $D_2 = \mu I_m$ with $\mu = \lambda \sqrt[m]{\det(D^{1/2})}$ such that $W_{\text{wPCA}} = \mu D^{-1/2} U^\top$.

Symmetric whitening (SYM)

Among the non-orthogonal decorrelation transforms, symmetric whitening stays as close to the input representation as possible (in Frobenius norm) [39]. In terms of early vision this may be seen as an implementation of a wiring length minimization principle. Remarkably, the basis functions of symmetric whitening resemble the center-surround shape of retinal ganglion cell receptive fields when applied to the pixel representation of natural images [15]. The symmetric whitening transform is obtained by setting $V = U$ and $D_2 = \mu I_m$ such that $W_{\text{SYM}} = \mu U D^{-1/2} U^\top$.

Random whitening (RND)

As a baseline which neither exploits a special structure with respect to the input representation nor makes use of higher-order correlations we also consider a completely random transformation. To obtain a random orthogonal matrix we first draw a random matrix G from a Gaussian matrix-variate distribution and then we set $V_{\text{RND}} = (GG^\top)^{-1/2} G$. With $D_2 = \mu I_m$ we obtain $W_{\text{RND}} = \mu V_{\text{RND}} D^{-1/2} U^\top$.

White independent component analysis (wICA)

Finally, ICA is the transformation which has been suggested to explain the orientation selectivity of V1 simple cells [7; 21]. Set $V = V_{\text{ICA}}$ for which the multi-information $I[Y]$ takes a minimum. With $D_2 = \mu I_m$ we obtain $W_{\text{wICA}} = \mu V_{\text{ICA}} D^{-1/2} U^\top$.

Normalized independent component analysis (nICA)

Normalized independent component analysis (nICA) differs from white ICA (W_{wICA}) only by a different choice of the second diagonal matrix D_2 . Instead of having equal variance in each coefficient, we now choose D_2 such that the corresponding basis vector of each coefficient has the same length in pixel space. It is easy to see that our first two criteria, the multi-information and the negative log-likelihood, are invariant under changes in D_2 . It makes a difference for the rate-distortion curves as in our setup the variance (or, more precisely, the standard deviation) determines the bit allocation. Practically, W_{nICA} can be determined by using W_{wICA} as follows: First, we compute the matrix inverse $A := W_{\text{wICA}}^{-1}$ and determine the Euclidean norm $a_1, \dots, a_m$ of the column vectors of A . With $D_a = \text{diag}(a_1, \dots, a_m)$, we then obtain $W_{\text{nICA}} = \frac{1}{\sqrt[m]{\det(D_a)}} D_a W_{\text{wICA}}$.

ICA algorithm

If the true joint probability distribution is known, the minimization of the multi-information over all linear transformations can be formulated without any assumptions about the shape of the distribution. In practice, the multi-information has to be estimated from a finite amount of data which requires to make assumptions about the underlying density.

There are many different ICA algorithms which differ in the assumptions made and also in the optimization technique employed. The choice of the particular ICA algorithm used here was guided by a set of requirements that arise from the specific problem setting. Although a wide variety of ICA algorithms has been published, none of them fits exactly all of our requirements.

We would like to use an ICA algorithm, which gives the ICA image basis the best chance for the comparison with other image representations. For the comparison of the multi-information reduction, we are using the OPT estimator introduced in [26] which has been found to give the most reliable results. This estimator employs a parametric estimate of the coefficient distributions based on the exponential power family which is known to provide an excellent fit to the coefficient distributions of natural images [40; 26]. Our ICA algorithm should make the same assumptions about the data as we make for the final comparison of the multi-information reduction. Therefore, we are also using the exponential power family model for the marginal densities during the minimization of the multi-information. In addition, we want to have an ICA basis which is indistinguishable from the other image representations with respect to the second-order statistics. Therefore, we are using a pre-whitened ICA algorithm, whose search space is restricted to the subgroup of orthogonal matrices $SO(n)$. One of the most efficient ICA methods in the public domain specialized to pre-whitened ICA is FastICA [41]. We use this fixed-point algorithm as an initialization. Subsequently, the solution is further refined by performing a gradient ascent over the manifold of orthogonal matrices on the likelihood of the data, when each marginal is modelled by a the exponential power distribution as in the case of the OPT estimator.

In order to optimize the objective function over the subspace of orthogonal matrices, we adapted the algorithms for Stiefel manifolds proposed by Edelman *et al.* [42] to the simpler case of orthogonal groups and combined it with the line-search routine `dbrent` from [43] to achieve a rather straightforward gradient descent algorithm. For the initialization with FastICA, we use the Gaussian non-linearity, the symmetric approach and a tolerance level of 10^{-5} .

Spherically symmetric model

A well known result by Maxwell [44] states that the only factorial distribution invariant against arbitrary orthogonal transformations is the isotropic Gaussian distribution. Natural images exhibit marginals which are significantly more peaked than Gaussian. Nevertheless, their distribution does share the spherical symmetry with the Gaussian as already found by [45] for gabor filter pairs and lately exploited by [46] for nonlinear image representations. Therefore, it makes sense to compare the performance of the ICA model with a spherically symmetric model of the whitened data $\mathbf{y}_w = W_{\text{RND}}\mathbf{x}$. Note that any spherically symmetric model is still invariant under orthogonal transformations while only the Gaussian additionally exhibits marginal independence.

While the radial distribution of a Gaussian (i.e. the distribution over the lengths of the random vectors) is a χ distribution, whose shape and scale parameter is determined by the number of dimensions and the variance, respectively, the spherical symmetric model may be seen as a generalization of the Gaussian, for which the radial distribution $p(r)$ with $r := \|\mathbf{y}\|_2$ can be of arbitrary shape. The density of the spherically symmetric distribution (SSD) is defined as $p_{\mathbf{y}}(\mathbf{y}) = p_r(r)/S_n(r)$, where $S_n(r) = r^{n-1}2\pi^{n/2}/\Gamma(n/2)$ is the surface area of a sphere in $\mathbb{R}^n$ with radius r . For simplicity we will model the radial distribution with a member of the

Gamma family

$$p(r) = \frac{r^{u-1} \exp\left(-\frac{r}{s}\right)}{s^u \Gamma(u)}, \quad r \geq 0 \quad (6)$$

with shape parameter u and scale parameter s , which can be easily matched to the mean and variance of the empirical distribution via $s = \widehat{\text{Var}}[r] / \hat{\mathbb{E}}[r]$ and $u = \hat{\mathbb{E}}[r]^2 / \widehat{\text{Var}}[r]$.

Dataset

The difference in the performance between ICA and other linear transformations clearly depends on the data. For *gray-scale* images we observed in our previous study [26] that the difference in the multi-information between ICA and any other decorrelation transform is consistently smaller than 5%. In particular, we controlled for the use of different pictures and for the effect of different pre-processing steps.

Here, we resort to the dataset used in a previous study [23; 24], which among all previous studies reported the largest advantage of ICA compared to PCA. This *color* image dataset is based on the Bristol Hyperspectral Images Database [47] that contains multi-spectral recordings of natural scenes taken in the surroundings of Bristol, UK and in the greenhouses of Bristol Botanical Gardens. The authors of [24] kindly provided to us a pre-processed version of the image data where spectral radiance vectors were already converted into LMS values. During subsequent processing the reflectance standard was cut out and images were converted to log intensities (cf. [24]).

All images come at a resolution of 256×256 pixels. From each image circa 5000 patches of size 7×7 pixels were drawn at random locations (circa 40000 patches in total). For chromatic images with three color channels (LMS) each patch is reshaped as a $7 \times 7 \times 3 = 147$ -dimensional vector. To estimate the contribution of color information, a comparison with monochromatic images was performed where gray-value intensities were computed as $I = \log(\frac{1}{3}(L + M + S))$ and exactly the same patches were used for analysis. In the latter case, the dimensionality of a data sample is thus reduced to 49 dimensions. Our motivation to chose 7×7 patches is to ensure maximal comparability to the study of [24]. We carried out the same analysis for patch sizes of 15×15 as well. For the sake of clarity, only the number for the 7×7 patches are reported in this paper. The results for 15×15 can be found in the additional material. All experiments are carried out over ten different training and test sets sampled independently from the original images.

Since the statistics of the constant illumination part of image patches, i.e. the DC component, differs significantly from the statistics of luminance variations, we removed the DC component from the patches before further transforming them. In order to not affect the entropy of the data, we used an orthogonal transformation. The projector P_{remDC} is computed such that the first (for each color channel) component of $P_{remDC}\mathbf{x}$ corresponds to the DC component(s) of that patch. One such a possible choice is the matrix

$$P = \begin{pmatrix} 1 & 0 & 0 & \dots \\ 1 & 1 & 0 & \dots \\ 1 & 0 & \ddots & \dots \\ \vdots & & & 1 \end{pmatrix}^\top$$

However, this is not an orthogonal transformation. Therefore, we decompose P into $P = QR$ where R is upper triangular and Q is an orthogonal transform. Since $P = QR$, the first column of Q must be a multiple of the vector with all coefficients equal to one (due to the upper triangularity of R). Therefore, the first component of $Q^\top \mathbf{x}$ is a multiple of the DC component. Since Q is an orthonormal transform, using all but the first row of $Q^\top$ for P_{remDC} projects out the DC component. In the case of color images P_{remDC} becomes a block-diagonal matrix with $Q^\top$ as diagonal elements for each channel.

By removing the DC component in that manner, all linear transformations are applied in $n - 1$ dimensions, if n denotes the number of pixels in the original image patch. In this case the marginal entropy of the DC-components has to be included in the computation of the multi-information in order to ensure a valid comparison with the original pixel basis. We use the same estimators as in [26] to estimate the marginal entropy of DC-component.

Results

Filter Shapes

As in previous studies [7; 21] the filters derived with ICA exhibited orientation selective tuning properties similar to those observed for V1 simple cells (see Figure 1). For illustration, we also show the basis functions learned with PCA and RND in Figure 1. The basis functions A are obtained by inverting the filter matrix W (including the DC component). The result is displayed in the upper panel (Figure 1 **A-C**). Following common practice, we also visualize the basis functions after symmetric whitening (Figure 1 **D-F**).

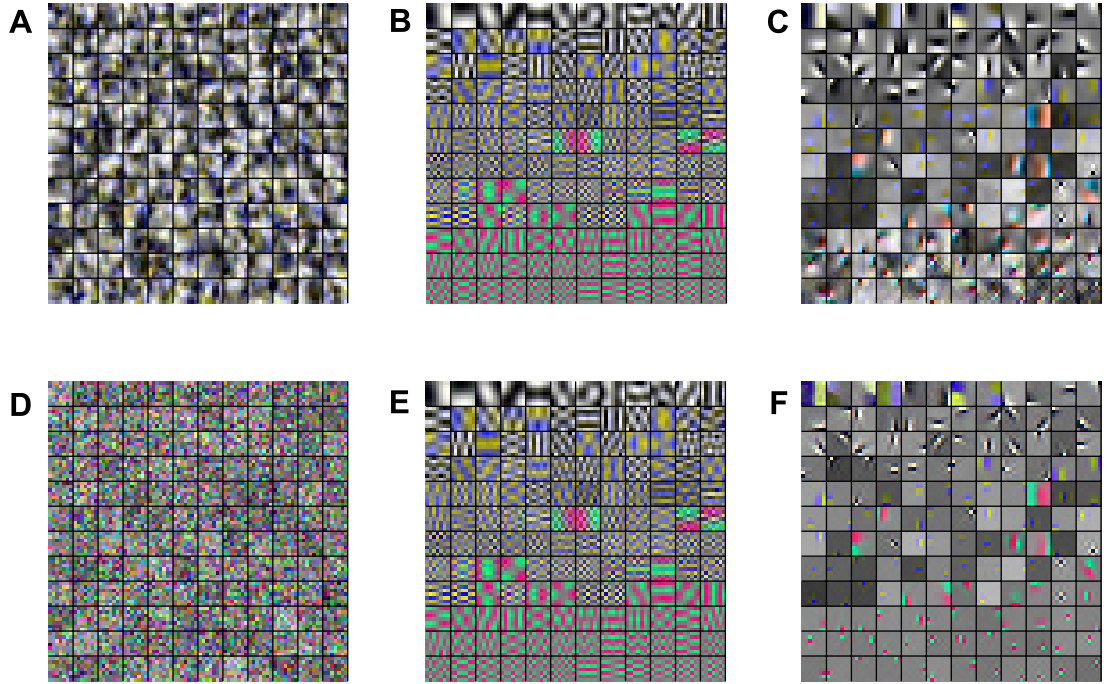


Figure 1: **Examples for Receptive Fields of Various Image Transforms** Basis functions of a random decorrelation transform (**RND**), principal component analysis (**PCA**) and independent component analysis (**ICA**) in pixel space (**A-C**) and whitened space (**E-F**). The image representation in whitened space is obtained by left multiplication with the matrix square root of the inverse covariance matrix $C^{-1/2}$. This figure can only give a rough idea of the shape of the basis functions. For a detailed inspection of the basis functions we refer the reader to our web page <http://www.kyb.mpg.de/bethge/code/QICA/> where we provide all the data and code used in this paper.

The basis functions of both PCA and ICA exhibit color opponent coding but the basis functions of ICA are additionally localized and orientation selective. The basis functions of the random decorrelation transform does not exhibit any regular structure besides the fact that they are bandpass. The following quantitative comparisons will show, however, that the distinct shape of the ICA basis functions does not yield a clear advantage for redundancy reduction and coding efficiency.

Multi-information

The multi-information is the true objective function that is minimized by ICA over all possible linear decorrelation transforms. Figure 2 shows the reduction in multi-information achieved with different decorrelation transforms including ICA for chromatic and gray value images, respectively. For each representation, the results are reported in bits per component, i.e. as

marginal entropies averaged over all dimensions:

$$\langle h \rangle = \frac{1}{n} \sum_{k=1}^n h[p_k(y_k)] \quad (7)$$

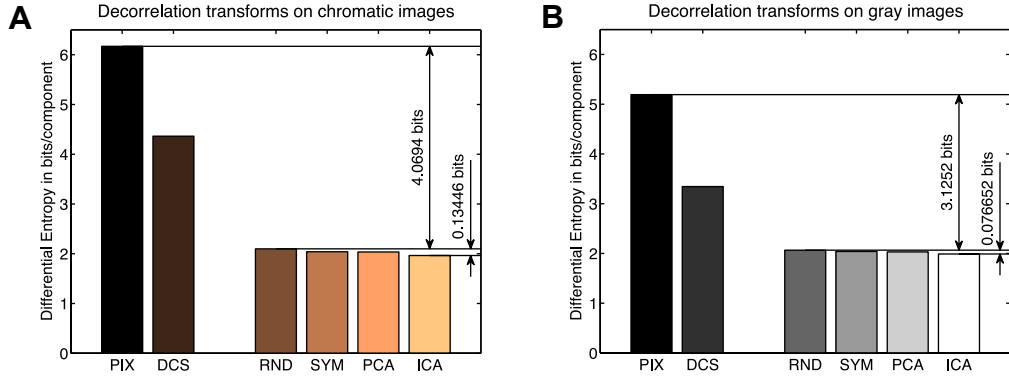


Figure 2: Multi-Information Reduction per Dimension Average differential entropy $\langle h \rangle$ for the pixel basis (PIX), after separation of the DC component (DCS), and after application of the different decorrelation transforms. The difference between PIX and RND corresponds to the redundancy reduction that is achieved with a random second-order decorrelation transform. The small difference between RND and ICA is the maximal amount of higher-order redundancy reduction that can be achieved by ICA. Diagram (A) shows the results for chromatic images and diagram (B) for gray value images. For both types of images, only a marginal amount can be accounted to the reduction of higher order dependencies.

Table 1 shows the corresponding values for the transformations RND, SYM, PCA and ICA. For both chromatic images and gray-value intensities, the lowest and highest reduction is achieved with RND or ICA, respectively. However, the additional gain in the multi-information reduction achieved with ICA on top of RND constitutes only 3.20% for chromatic images and 2.39% for achromatic in comparison with the total reduction relative to the pixel basis (PIX). This means that only a small fraction of redundancy reduction can actually be accounted to the removal of higher-order redundancies with ICA.

Absolute Difference			Relative Difference		
	Color	Gray		Color	Gray
RND-PIX	-4.0694 ± 0.0043	-3.1252 ± 0.0043			
SYM-RND	-0.0593 ± 0.0004	-0.0259 ± 0.0006	$\frac{\text{SYM-RND}}{\text{SYM-PIX}}$	1.44 ± 0.01	0.82 ± 0.02
PCA-RND	-0.0627 ± 0.0008	-0.0353 ± 0.0011	$\frac{\text{PCA-RND}}{\text{PCA-PIX}}$	1.52 ± 0.02	1.12 ± 0.03
ICA-RND	-0.1345 ± 0.0008	-0.0767 ± 0.0008	$\frac{\text{ICA-RND}}{\text{ICA-PIX}}$	3.20 ± 0.02	2.39 ± 0.02

Table 1: **Comparison of the Multi-Information Reduction for Chromatic and Achromatic Images** Differences in the multi-information reduction between various decorrelation transforms (SYM, PCA, ICA) relative to a random decorrelation transform (RND) compared to the multi-information reduction achieved with the random decorrelation transform relative to the original pixel basis (RND-PIX). The *absolute* multi-information reduction is given in bits/component on the left hand side. How much more the special decorrelation transforms SYM, PCA and ICA can reduce the multi-information *relative* to the random (RND) one is given in percent on the right hand side.

One may argue that the relatively small patch size of 7×7 pixel may be responsible for the small advantage of ICA as all decorrelation functions already getting the benefit of localization. In order to address the question how the patch size affects the linear redundancy reduction, we repeated the same analysis on a whole range of different patch sizes. Figure 3 shows the multi-information reduction with respect to the pixel representation (PIX) achieved by the transformations RND and ICA. The achievable reduction quickly saturates with increasing patch size such that its value for 7×7 image patches is already at about 90% of its asymptote. In particular, one can see that the relative advantage of ICA over other transformations is still small ($\sim 3\%$) also for large patch sizes. All Tables and Figures for patch size 15×15 can be found in the additional material.

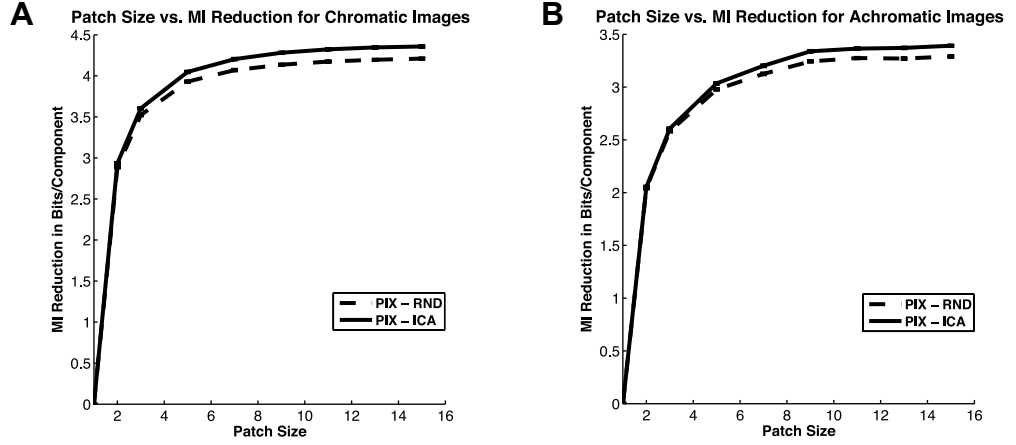


Figure 3: Patch Size vs. Redundancy Reduction Redundancy reduction as a function of the patch size. The graph shows the multi-information reduction with respect to the pixel representation (PIX) achieved by the transformations RND and ICA. The achievable reduction quickly saturates with increasing patch size such that its value for 7×7 image patches is already at about 90% of its asymptote. In particular, the small advantage of ICA over other transformation does not only occur for small patch sizes for which spatial localization is imposed on the basis functions for all transformations due to the patch boundaries.

Average log-loss

Since redundancy reduction can also be interpreted as a special form of density estimation we also look at the average log-loss which quantifies how well the underlying density model of the different transformations is matched to the statistics of the data. Table 2 shows the average log-loss (ALL) and the differential log-likelihood (DLL) in bits per component. For the average log-loss, ICA achieved an ALL of 1.78 bits per component for chromatic images and 1.85 bits per component for achromatic images. Compared to the ALL in the RND representation of 1.94 bits and 1.94 bits, respectively, the gain achieved by ICA is again small. Additionally, the ALL values were very close to the differential entropies, resulting in small DLL values. This confirms that the exponential power distribution fits the shape of the individual marginal coefficient distributions well. Therefore, we can safely conclude that the advantage of ICA is small not only in terms of redundancy reduction as measured by the multi-information, but also in the sense of density estimation.

	Color		Gray	
A	ALL		ALL	
RND	1.9486 ± 0.0035		1.9414 ± 0.0044	
SYM-RND	-0.0881 ± 0.0004		-0.0402 ± 0.0005	
PCA-RND	-0.0751 ± 0.0009		-0.0391 ± 0.0011	
ICA-RND	-0.1637 ± 0.0007		-0.0880 ± 0.0007	
SSD-RND	-0.2761 ± 0.0025		-0.2868 ± 0.0032	
B	DLL	$\langle \alpha \rangle$	DLL	$\langle \alpha \rangle$
RND	-0.0113 ± 0.0007	1.0413 ± 0.0026	-0.0057 ± 0.0006	1.0132 ± 0.0046
SYM	-0.0388 ± 0.0009	0.8961 ± 0.0021	-0.0195 ± 0.0009	0.9486 ± 0.0040
PCA	-0.0224 ± 0.0007	0.9145 ± 0.0024	-0.0087 ± 0.0007	0.9425 ± 0.0025
ICA	-0.0378 ± 0.0009	0.7687 ± 0.0017	-0.0154 ± 0.0011	0.8434 ± 0.0025

Table 2: **Comparison of the Average Log-Loss (ALL) and the Differential Log-Likelihood (DLL) Chromatic and Achromatic Images** **A.** The first row shows the average log-loss (ALL, in bits/component) of the density model determined by the linear transformation RND. The value was obtained by averaging over 10 separately sampled training and test sets of size 40.000 and 50.000, respectively. The following rows show the difference of the ALL of the models SYM, PCA, ICA and the spherically symmetric density (SSD) to the ALL determined by linear transformation RND. The large value for RND–ICA fundamentally contradicts the assumptions underlying the ICA model. **B.** The small DLL values suggest, that the exponential power distribution fits the shape of the individual coefficient distributions well. In addition, we also report the average exponent $\langle \alpha \rangle$ of the exponential power family fit to the individual coefficient distributions ($\alpha = 1$ corresponds to a Laplacian shape).

Comparison to a spherical symmetric model The fact that ICA fits the distribution of natural images only marginally better than a random decorrelation transform implies that the generative model underlying ICA does not apply to natural images. In order to assess the importance of the actual filter shape, we fitted a spherically symmetric model to the filter responses. The likelihood of such a model is invariant under post-multiplication of an orthogonal matrix, i.e. the actual shape of the filter. Therefore, a good fit of such a model provides strong evidence against a critical role of certain filter shapes.

As shown in Table 2, the ALL of the SSD model is 1.67 bits per component for chromatic images and 1.65 bits per component for achromatic images. This is significantly smaller than the ALL of ICA indicating that it fits the distribution of natural images much better than ICA does. This result is particularly striking if one compares the number of parameters fitted in the ICA model compared to the SSD case: After whitening, the optimization in ICA is done over the manifold of orthogonal matrices which has $m(m-1)/2$ free parameters (where m denotes the number of dimensions without the DC components). The additional optimization of the shape parameters for the exponential power family fitted to each individual component adds another m parameters. For the case of 7×7 color image patches we thus have $\frac{144 \cdot 145}{2} = 10440$ parameters. In stark contrast, there are only two free parameters in the SSD model with a radial Gamma distribution, the shape parameter u and the scale parameter s . Nevertheless, for chromatic images the gain of the SSD model relative to random whitening is almost twice

as large as that of ICA and even three and a half times as large for achromatic images.

Since the SSD model is completely independent of the choice of the orthogonal transformation after whitening, its superior performance compared with ICA provides a very strong argument against the hypothesis that orientation selectivity plays a critical role for redundancy reduction. In addition, it also corroborates earlier arguments that has been given to show that the statistics of natural images does not conform to the generative model underlying ICA [45; 48].

Besides the better fit of the data by the SSD model, there is also a more direct way of demonstrating the dependencies of the ICA coefficients: If $Y_{\text{wICA}} = (\mathbf{y}_1, \dots, \mathbf{y}_N)$ is data in the wICA representation, then the independence assumption of ICA can be simulated by applying independent random permutations to the rows of Y_{wICA} . Certainly, such a shuffling procedure does not alter the histograms of the individual coefficients but it is suited to destroy potential statistical dependencies among the coefficients. Subsequently, we can transform the shuffled data Y_{sICA} back to the RND basis $Y_{\text{sRND}} = W_{\text{RND}} W_{\text{wICA}}^{-1} Y_{\text{sICA}}$. If the ICA coefficients were independent, the shuffling procedure would not alter the joint statistics, and hence, one should find no difference in the multi-information between Y_{sRND} and Y_{RND} . But infact, we observe a large discrepancy between the two (Figure 4). The distributions of the sRND coefficients were very close to Gaussians and the average marginal entropy of sRND yielded $\langle h_{\text{sRND}} - h_{\text{Gauss}} \rangle \approx -0.001$ bits in contrast to $\langle h_{\text{RND}} - h_{\text{Gauss}} \rangle \approx -0.1$ bits. In other words, the finding that for natural images the marginals of a random decorrelation transform have Laplacian shape ($\alpha \approx 1$) stands in clear contradiction to the generative model underlying ICA. If the ICA model was valid, one would expect that the sum over the ICA coefficients would yield Gaussian marginals due to the central limit theorem. In conclusion, we have very strong evidence that the ICA coefficients are not independent in case of natural images.

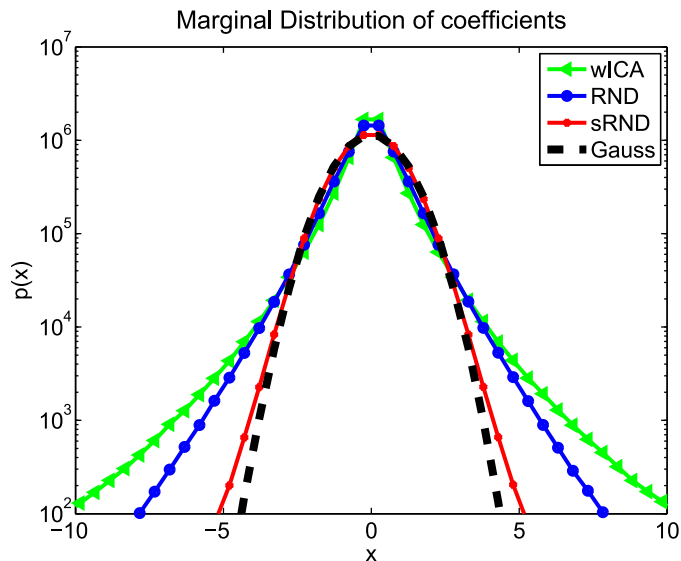


Figure 4: **The Distribution of Natural Images does not Conform with the Generative Model of ICA** In order to test for statistical dependencies among the coefficients Y_{wICA} of whitened ICA for single data samples, the coefficients were shuffled among the data points along each dimension. Subsequently, we transform the resulting data matrix Y_{sICA} into $Y_{sRND} = W_{RND}W_{wICA}^{-1}Y_{sICA}$. This corresponds to a change of basis from the ICA to the random decorrelation basis (RND). The plot shows the log-histogram over the coefficients over all dimensions. If the assumptions underlying ICA were correct, there would be no difference between the histogram of Y_{sRND} and Y_{RND} .

Rate-distortion curves

There are different ways to account for the information bottleneck that is imposed by neural noise and firing rate limitations. The advantage with respect to a plain information maximization criterion can equivalently be measured by the multi-information criterion considered above. In order to additionally account for the question which representation encodes most efficiently the *relevant* image information, we also present rate distortion curves which show the minimal reconstruction error as a function of the information rate.

We compared the rate-distortion curves of wICA, nICA, wPCA and oPCA (see Figure 5). Despite the fact that ICA is optimal in terms of redundancy reduction (see Table 2), oPCA performs optimal with respect to coding efficiency. wPCA in turn performs worst and remarkably similar to wICA. Since wPCA and wICA differ only by an orthogonal transformation, both representations are bound to the same metric. oPCA is the only transformation which has the same metric as the pixel representation according to which the reconstruction error is determined. By normalizing the length of the ICA basis vectors in the pixel space, the metric of nICA becomes more similar to the pixel basis and the performance with respect to coding efficiency improved considerably. Nevertheless, for a fixed reconstruction error the discrete

entropy after quantization in the oPCA basis is up to 1 bit/component *smaller* than for the corresponding nICA-basis.

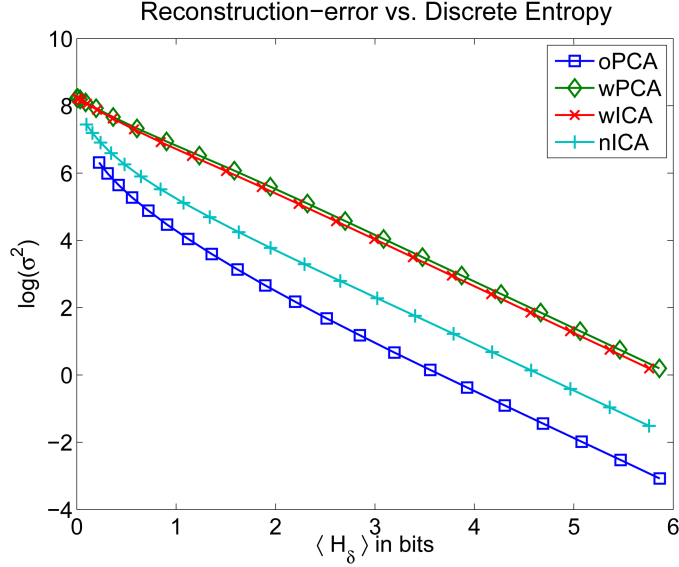


Figure 5: **Rate-distortion Curves** Rate-distortion curve for PCA and ICA when equalizing the output variances (wPCA and wICA) and when equalizing the norm of the corresponding image bases in pixel space (oPCA and nICA). The plot shows the discrete entropy H_δ in bits (averaged over all dimensions) against the log of the squared reconstruction error σ^2 . oPCA outperforms all other transforms in terms of coding efficiency. wPCA in turn performs worst and remarkably similar to wICA. Since wPCA and wICA differ only by an orthogonal transformation, both representations are bound to the same metric. oPCA is the only transformation which has the same metric as the pixel representation according to which the reconstruction error is determined. By normalizing the length of the ICA basis vectors in the pixel space, the metric of nICA becomes more similar to the pixel basis and the performance with respect to coding efficiency can be seen to improved considerably.

In order to understand this result more precisely, we analyzed how the quantization of the coefficients affects the two variables of the rate-distortion function, *discrete entropy* and *reconstruction error*.

Figure 6 shows an illustrative example in order to make the following analysis more intuitive. The example demonstrates that the quality of a transform code not only depends on the redundancy of the coefficients but also on the shape of the partition cells induced by the quantization. In particular, when the cells are small (i.e. the entropy rate is high), then the reconstruction error mainly depends on having cell shapes that minimize the average distance to the center of the cell. Linear transform codes can only produce partitions into parallelepipeds (Figure 6B). The best parallelepipeds are cubes (Figure 6A). This is why PCA yields the (close to) optimal trade-off between minimizing the redundancy *and* the distortion, as it is the only orthogo-

nal transform that yields uncorrelated coefficients. For a more comprehensive introduction to transform coding we refer the reader to the excellent review by Goyal [34].

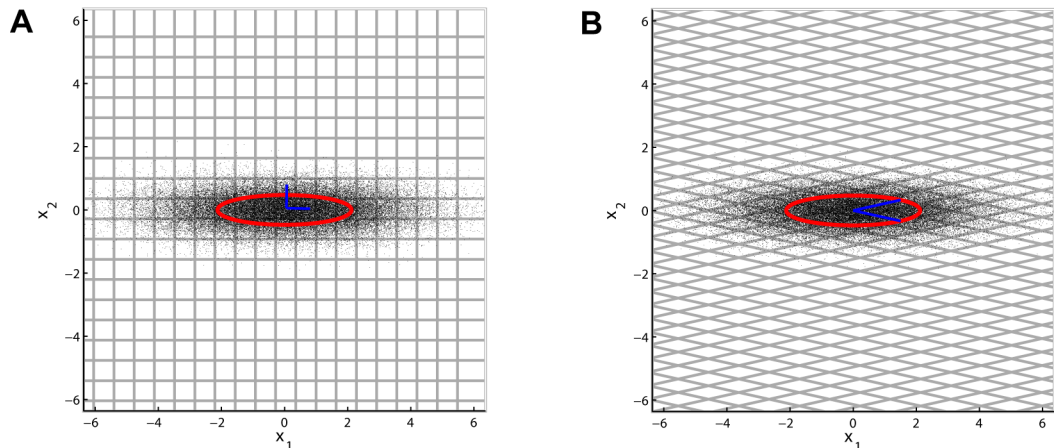


Figure 6: The Partition Cell Shape is Crucial for the Quantization Error The quality of a source code depends on the shapes of the partition cells and on varying the sizes of the cells according to the source density. When the cells are small (i.e. the entropy rate is high), then, the quality mainly depends on having cell shapes that minimize the average distance to the center of the cell. For a given volume, a body in Euclidean space that minimizes the average distance to the center is a sphere. The best packings (including the hexagonal case) cannot be achieved with linear transform codes. Transform codes can only produce partitions into parallelepipeds, as shown here for two dimensions. The best parallelepipeds are cubes. Therefore PCA yields the (close to) optimal trade-off between minimizing the redundancy *and* the distortion as it is the only orthogonal decorrelation transform (see [34] for more details). The figure shows 50.000 samples from a bivariate Gaussian random variable. Plot **A** depicts a uniform binning (bin width $\Delta = 0.01$, only some bin borders are shown) induced by the only orthogonal basis for which the coefficients x_1 and x_2 are decorrelated. Plot **B** shows uniform binning in a decorrelated, but not orthogonal basis (indicated by the blue lines). Both cases have been chosen such that the multi-information between the coefficients is identical and the same entropy rate was used to encode the signal. However, due to the shape of the bins in plot **B** the total quadratic error increases from 0.4169 to 0.9866. The code for this example can be also downloaded from <http://www.kyb.tuebingen.mpg.de/bethge/code/QICA/>.

Discrete entropy Given a uniform binning of width δ the discrete entropy H_δ of a probability density $p(x)$ is defined as

$$H_\delta = - \sum_i p_i \log p_i \quad \text{with} \quad p_i = \int_{B_i} p(x) dx, \quad (8)$$

where B_i denotes the interval defined by the i -th bin. For small bin-sizes $\delta \rightarrow 0$, there is a close relationship between *discrete* and *differential* entropy: Because of the mean value theorem we

can approximate $p_i \approx p(\xi_i)\delta$ with $\xi \in B_i$, and hence

$$\begin{aligned} H_\delta &\approx - \sum_i p(\xi_i)\delta \log[p(\xi_i)\delta] \\ &= - \underbrace{\sum_i \delta p(\xi_i) \log p(\xi_i)}_{\xrightarrow{\delta \rightarrow 0} \int p(x) \log p(x) dx} - \log \delta \underbrace{\sum_i p(\xi_i)\delta}_{\xrightarrow{\delta \rightarrow 0} 1}. \end{aligned}$$

Thus, we have the relationship $H_\delta \approx h - \log \delta$ for sufficiently small δ (i.e. high-rate quantization). In other words, H_δ asymptotically grows linearly with $(-\log \delta)$. Therefore, we can fit a linear function to the asymptotic branch of the function $H_\delta = H_\delta(-\log \delta)$ which is plotted in Figure 7A (more precisely we are plotting the average over all dimensions). If we take the ordinate intercept of the linear approximation, we obtain a nonparametric estimate of the differential entropy which can be compared to the entropy estimates reported above (Those estimates were determined with the OPT estimator). Equivalently, one can consider the function $h_\delta(-\log \delta) := H_\delta - (-\log \delta)$ which gives a better visualization of the error of the linear approximation (Figure 7, left, dashed line). For $h_\delta(-\log \delta)$ the differential entropy is obtained in the limit $h = \lim_{(-\log \delta) \rightarrow \infty} h_\delta = \lim_{\delta \rightarrow 0} h_\delta$.

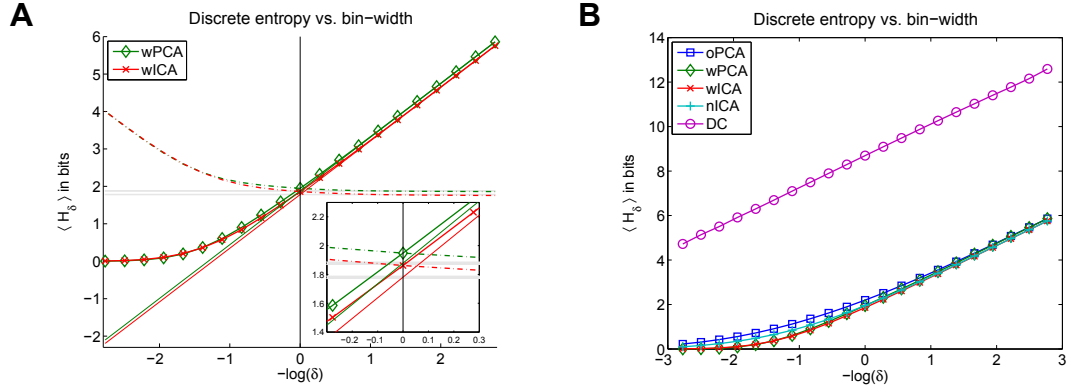


Figure 7: Discrete vs. Differential Entropy **A.** Relationship between discrete and differential entropy. Discrete entropy $\langle H_\delta \rangle$ averaged over all channels as a function of the negative log-bin-width. The straight lines constitute the linear approximation to the asymptotic branch of the function. Their interception with the y-axis are visualized by the gray shaded, horizontal lines. The dashed lines represent $\langle h_\delta \rangle$ which converge to the gray shaded lines for $\delta \rightarrow 0$. **B.** There are only small differences in the average discrete entropy for oPCA, wPCA, wICA, nICA as a function of the negative log-bin-width. Since the discrete entropy of the DC component is the same for all transforms, it is not included in that average but plotted separately instead.

This analysis shows that differences in differential entropy in fact translate into differences in discrete entropy after uniform quantization with sufficiently small bins. Accordingly, the minimization of the multi-information as proposed by the redundancy reduction hypothesis does in fact also minimize the discrete entropy of a uniformly quantized code. In particular, if we look at the discrete entropy of the four different transforms, oPCA, wPCA, wICA, nICA (Figure 7B), we find that asymptotically the two PCA transforms require slightly more entropy than the two ICA transforms, and there is no difference anymore between oPCA and wPCA or wICA and nICA. This close relationship between discrete and differential entropy for high-rate quantization, however, is not sufficient to determine the coding efficiency evaluated by the rate–distortion curve. The latter requires to compare also the reconstruction error for the given quantization.

Reconstruction error The reconstruction error is defined as the mean squared distance in the pixel basis between the original image and the image obtained by reconstruction from the quantized coefficients of the considered transformation. For the reconstruction, we simply use the inverse of the considered transformation, which is optimal in the limit of high-rate quantization.

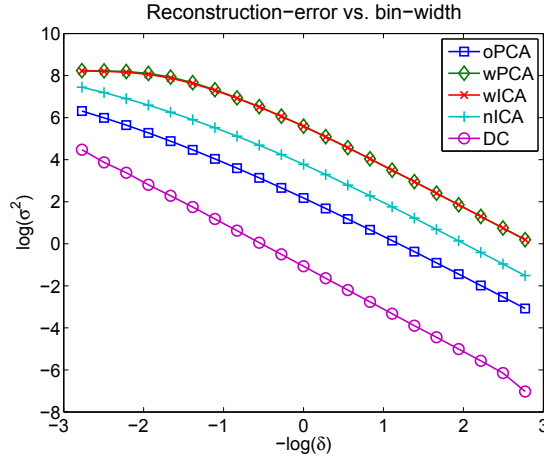


Figure 8: **Reconstruction Error vs. Bin Width of Discrete Entropy** Reconstruction error σ^2 as a function of the bin-width δ , shown on a logarithmic scale. The differences between the different transforms are relatively large. Only the two transformations with exactly the same metric, wPCA and wICA, exhibit no difference in the reconstruction error.

When looking at the reconstruction error as a function of the bin width (Figure 8) we can observe much more pronounced differences between the different transformations than it was the case for the entropy. As a consequence, the differences in the reconstruction error turn out to be much more important for coding efficiency than the differences in the entropy. Only the two transformations with exactly the same metric, wPCA and wICA, exhibit no difference in the reconstruction error. This suggests that minimization of the multi-information is strictly

related to efficient coding if and only if the transformation with respect to the pixel basis is orthogonal. As we have seen that the potential effect of higher-order redundancy reduction is rather small, we expect that the PCA transform constitutes a close approximation to the minimizer of the multi-information among all orthogonal transforms because PCA is the only orthogonal transform which removes all second-order correlations.

Discussion

The structural organization of orientation selectivity in the primary visual cortex has been associated with self-organization since the early seventies [49], and much progress has been made to narrow down the range of possible models compatible with the empirical findings [e.g. 50; 51; 52]. The link to visual information processing, however, still remains elusive [53; 54; 55].

More abstract unsupervised learning models which obtain orientation selective filters using sparse coding [7] or ICA [21] try to address this link between image processing and the self-organization of neural structure. In particular, these models not only seek to reproduce the orientation tuning properties of V1 simple cells but they additionally address the question of how the simple cell responses collectively can instantiate a representation for arbitrary images. Furthermore, these image representations are learned from an information theoretic principle assuming that the learned filters exhibit advantageous coding properties.

The goal of this study is to quantitatively test how much evidence there is for this assumption. To this end, we investigated three criteria, the multi-information—i.e. the objective function of ICA—the average log-loss, and rate-distortion curves. There are a number of previous studies which also tried to quantify how large the advantage of the orientation selective ICA filters is relative to second-order decorrelation transformations. In particular, four papers [22; 23; 24; 26], are most closely related to this study as all of them compare the average log-loss of different transformations. Unfortunately, they do not provide a coherent answer to the question how large the advantage of ICA is compared to other decorrelation transforms.

Lewicki and Olshausen [22] claim that their learned bases show a 15 – 20% improvement over traditional bases, but it is not really clear how exactly this number was obtained. According to reported values in their study (Table 1 in [22]) one could conclude that the advantage of ICA over PCA is even larger. Apart from that, a principle problem of this study is that the entire analysis is based on a dataset in which all images have been preprocessed with a bandpass filter as in [7]. Since bandpass filtering already removes a substantial fraction of second-order correlations in natural images, their study is likely to systematically underestimate the total amount of second-order correlations in natural images. Therefore, a valid comparison between second-order and higher-order redundancy reduction is not possible from their study.

Lee *et al* [23; 24] reported an advantage of over 100% percent for ICA in the case of color images and a more moderate but substantial gain of about 20% for gray-value images. In order to avoid possible differences due to the choice of data set we here used exactly the same data as in [23; 24]. Very consistently, we find only a small advantage for ICA of less than five percent for both multi-information and the average log-loss. In particular, we are not able to reproduce the very large difference between color and gray-value images that they reported.

Unfortunately, it is not clear which estimation procedure was used in [23; 24]. Therefore, we cannot pinpoint where the differences in the numbers ultimately come from. There seems to be an inconsistency though between the kurtosis estimates and the average log-loss they reported.

The kurtosis they find for ICA is smaller than twenty. Thus, for the exponential power family which fits the coefficient statistics very well, we can derive that the Negentropy has to be less than 0.52 bits per pixel (cf. Equations (9) and (12) in [26]). The Negentropy quantifies the difference between the entropy of the maximum entropy distribution of same variance minus the true entropy of the distribution. Since the redundancy reduction due to PCA or any other decorrelation transform is around 4 bits per pixel, the maximum possible advantage for ICA should be less than 15% even if one uses the kurtosis estimate taken from [23; 24].

The estimators for the measures used for comparing the different linear transforms in the present study are well designed and have been shown to give correct results on artificial data [26]. Furthermore, Weiss and Freeman showed for an undirected probabilistic image model that whitening already yields 98% of the total performance [56]. Finally, the superior performance of the simple SSD model with only two free parameters provides a very strong explanation for why the gain achieved with ICA is so small relative to a random decorrelation transform: Since a spherically symmetric model is invariant under orthogonal transformations and provides a better fit to the data, the actual shape of the filter does not seem to be critical. It also shows that the fundamental assumption underlying ICA—the data are well described by a linear generative model with independent sources—is not justified in the case of natural images.

From all these results, we can safely conclude that the actual gain of ICA compared to PCA is smaller than 5% for both gray level images and color images.

Is smaller than 5% really small? A valid question to ask is whether comparing the amount of higher-order correlations to the amount of second-order correlations is the right thing to do. The reason why “bits” are the canonical units used to measure the multi-information and the average log-loss, originates from a coding theoretical theorem which says that the entropy is an (asymptotically) attainable lower bound to the average code word length (Differential entropy can be related in a meaningful way to discrete entropy assuming sufficiently fine quantization.) [35]. Hence, if the brain uses codes which are close to optimal, the multi-information measured in bits would correspond to the amount of resources (e.g. number of neurons or number of spikes) that it could save by the redundancy reduction. If the brain uses a suboptimal code, say a grandmother code for instance, then the number of necessary neurons would rather equal the number of states which grows exponentially with entropy. If we now suppose that $H_{PIX} > H_{RND} > H_{ICA}$ is the entropy of the pixels, of random whitening, and of ICA after quantization, respectively, then

$$\frac{H_{RND} - H_{ICA}}{H_{PIX} - H_{RND}} < 5\% \quad (9)$$

as reported in Table 1, implies that

$$\frac{2^{H_{RND}} - 2^{H_{ICA}}}{2^{H_{PIX}} - 2^{H_{RND}}} << 5\%. \quad (10)$$

In this sense we can argue that measuring bits (i.e. the “log-number” of states) rather than the number of states is a conservative way of showing that the improvement of ICA relative to decorrelation is small.

We have computed complete rate distortion curves for ICA and PCA showing that ICA performs even worse than PCA with respect to coding efficiency because of its unfavorable

metric. By disentangling the rate–distortion curves into *bin width*—*rate* curves and *bin width*—*distortion* curves, we show that the average log-loss can only account for differences in the rate for a given quantization bin width. It does not take into account, however, that the reconstruction error of two transforms can be quite different for a fixed bin width if they do not have the same metric, i.e. if they differ by more than just an orthogonal transformation. This is due to the fact that for sufficiently small bin widths the quality of the encoding depends on having cell shapes that minimize the average distance to the center of the cell [34]. Therefore, non-orthogonal decorrelation transforms suffer from disadvantageous cell shapes (Figure 6). This explains why ICA performs even worse than PCA with respect to coding efficiency in terms of mean squared reconstruction error. Hence, the advantage of ICA in redundancy reduction does not pay off in terms of reconstruction error. Finally, also perceptually image patches sampled from the ICA model do not look more similar to natural image patches than those sampled from the random decorrelation basis (Figure 9).

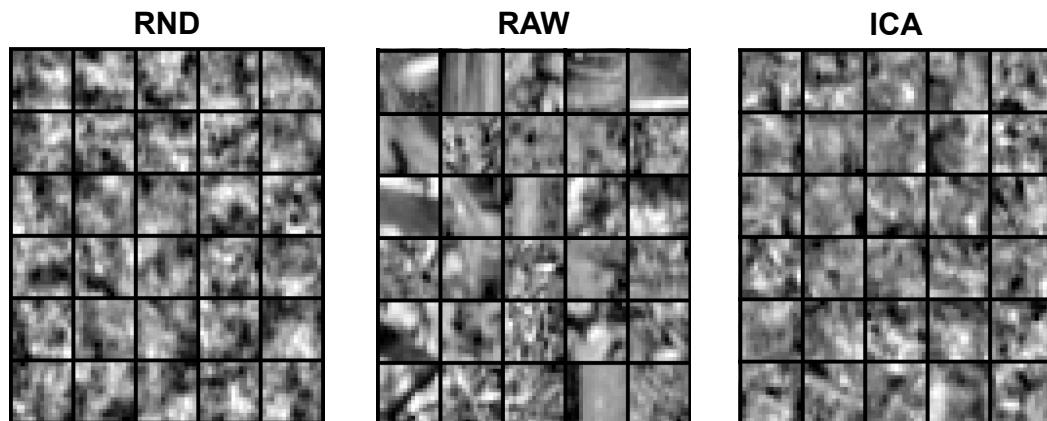


Figure 9: **Comparison of Patches Sampled From Different Image Models** The figure demonstrates that the visual appearance of samples from the ICA image model (right) do not look significantly more similar to samples from natural images (middle) than samples from the image model (left) with random (pink noise) basis functions.

In summary, we were not able thus far to come up with a meaningful interpretation for which the improvement of ICA would be recognized as being large. If such an interpretation exists it would very desirable to know as it might point to a possible refinement of the interpretation of the redundancy reduction hypothesis. On the basis of the present study, however, it seems rather unlikely that such a measure can be found. Instead, we think that our study provides solid evidence that orientation selective filters in a *linear* representation do not yield a clear advantage in terms of redundancy reduction and are rather suboptimal in terms of coding efficiency.

What about nonparametric approaches? The focus on linear redundancy reduction models in this study is motivated by the goal to first establish a solid and reproducible result for the

simplest possible case before moving on to more involved nonlinear transformations. Nevertheless, it is important to discuss what we can expect if the restriction to linear transformations is dropped. From a nonparametric analysis [25], Petrov and Zhaoping concluded that higher-order correlations in general contribute only very little to the redundancy in natural images and, hence, are probably not the main cause for the receptive field properties in V1. The empirical support for this claim, however, is not very strong as their comparison is based on mutual information estimates within a very small neighborhood of five pixels only. This is problematic as it is known that many kinds of higher-order correlations in natural images manifest themselves only in much higher-dimensional statistics [57]. Furthermore, their estimate of the amount of second-order correlations is not invariant against point-wise nonlinear transformations of the pixel intensities.

In a more recent non-parametric study, Chandler and Field arrived at a very different conclusion than Petrov and Zhaoping. They use nearest-neighbor based methods to estimate the joint entropy of natural images in comparison to pink noise and white noise [58] where pink noise denotes Gaussian noise with the same spectrum as that of natural images. As a result (Fig. 18) they find a smaller difference between pink noise and white noise as between natural images and pink noise. Thus, from their finding, it seems that the amount of higher-order correlations in natural images is even larger than the amount of second-order correlations. Also this result has to be taken with care: Apart from the fact that reliable non-parametric estimates in high-dimensions are difficult to obtain even if one resorts to nearest-neighbor based methods, the estimate of the amount of second-order correlations in [58] is not invariant against pointwise nonlinear transformations of the pixel intensities, too.

In summary, the results of the present nonparametric studies do not yield a clear picture how large the total amount of higher-order correlations in natural images really is. In fact, estimating the absolute amount of multi-information is an extremely difficult task in high dimensions. Therefore, the differences in the results can easily originate from the different assumptions and approximations made in these studies.

What about nonlinear image models? Apart from the non-parametric approaches, a large number of nonlinear image models has been proposed over the years which are capable to capture significantly more statistical regularities of natural images than linear ICA can do (e.g. [59; 60; 56; 61; 62; 63; 64; 65; 66]). In fact, Olshausen and Field [7] already used a more general model than linear ICA when they originally derived the orientation selective filters from higher-order redundancy reduction. In contrast to plain ICA, they used an *overcomplete* generative model which assumes more source signals than pixel dimensions. In addition, the sources are modeled as latent variables like in a factor analysis model. That is the data is assumed to be generated according to $\mathbf{x} = A\mathbf{s} + \xi$ where A denotes the overcomplete dictionary, $\mathbf{s}$ is distributed according to a sparse factorial distribution, and ξ is a Gaussian random variable. The early quantitative study by Lewicki and Olshausen [22] could not demonstrate an advantage of overcomplete coding in terms of coding efficiency and also the more recent work by Seeger [64] seems to confirm this conclusion. The addition of a Gaussian random variable ξ to $A\mathbf{s}$, however is likely to be advantageous as it may help to interpolate between the plain ICA model on the one hand and the spherically symmetric model on the other hand. A comparison of the average log-loss between this model and plain ICA has not been done yet but we can expect that this model can achieve a similar or even better match to the natural image statistics as

the spherically symmetric model.

The spherical symmetric model can also be modeled by a redundancy reduction transformation which changes the radial component such that the output distribution is sought to match a Gaussian distribution [46]. Hence, the redundancy reduction of this model is very similar to the average log-loss of the spherically symmetric distribution. From a biological vision point of view, this type of model is particularly interesting as it allows one to draw a link to divisive normalization, a prominent contrast gain control mechanism observed for virtually all neurons in the early visual system. Our own ongoing work [67] shows that this idea can be generalized to a larger class of L_p -spherically symmetric distributions [61]. In this way, it is possible to find an optimal interpolation between ICA and the spherically symmetric case [68]. That is, one can combine orientation selectivity with divisive normalization in a joint model. Our preliminary results suggests that optimal divisive normalization together with orientation selectivity allows for about 10% improvement while divisive normalization alone (i.e. the spherical symmetric model) is only 2% worse [67].

Note that, in general, orientation selectivity can only play a critical role if one assumes some form of regularization on the function space of possible transformations. Otherwise, the optimization problem would be highly degenerated [69]. Thus, even if we drop the constraint of linearity, we probably want to stay somewhat close to a linear function space. Typical examples would be the generalized linear model (i.e. adding pointwise nonlinearities) which does not have an effect on the multi-information at all, or—more interestingly—a scaling nonlinearity such as divisive normalization which we discussed above.

Concluding remarks Taken together, the current stage of statistical image modeling and quantitative model comparison suggests that it is rather unlikely that orientation selectivity plays a critical role for redundancy reduction even if the class of transformations is not limited to linear ones. This finding urges us to rethink how we can interpret the function of orientation selectivity in primary visual cortex. For one, we should further explore and quantify how nonlinearities and other known properties of V1 contribute to redundancy reduction. On the other hand, we should also try to extend the quantitative approach to include other goals than redundancy reduction only. While there are certainly many ideas about possible functions of orientation selective filtering, the crucial challenge is to turn those ideas into a quantitatively testable framework. For instance, many algorithms for edge detection, image segmentation, and texture classification use orientation selective filtering as a preprocessing step. Most frequently, however, it is not clear how critical this choice of image basis is for solving these tasks.

In order to achieve a more principled take on the potential use of orientation selectivity for early vision we are currently trying to extend the efficient coding framework to deal with other loss functions than mean squared error on the image pixels. Obviously, the goal of the visual system is not to preserve the representation of the visual input. Instead, seeing means to make successful predictions about behaviorally relevant aspects of the environment [70]. Since 3D shape inference is necessary to almost any naturally relevant task, it seems particularly interesting to explore the role of orientation selectivity in the context of 3D shape inference [71]. For a quantitative account of this problem one can seek to minimize the reconstruction error for the 3D shape rather than for its 2D image. Certainly, this task is much more involved than image reconstruction and there is still a long way to go. Nevertheless, we believe that going in this direction is a worthwhile enterprise which eventually may help us to unravel the

principles of neural processing in the brain that are ultimately responsible for our ability to see.

Acknowledgements

We would like to thank Philipp Berens, Roland Fleming and Jakob Macke for helpful comments on the manuscript. This work is supported by the German Ministry of Education, Science, Research and Technology through the Bernstein prize to MB (BMBF; FKZ: 01GQ0601), a scholarship to FS by the German National Academic Foundation, and the Max Planck Society.

References

- [1] Attneave F (1954) Informational aspects of visual perception. *Psychological Review* 61:183–193.
- [2] Barlow H (1959) Sensory mechanisms, the reduction of redundancy, and intelligence. In: *The Mechanisation of Thought Processes*. London: Her Majesty’s Stationery Office, pp. 535–539.
- [3] Atick J (1992) Could information theory provide an ecological theory of sensory processing? *Network* 3:213–251.
- [4] Barlow H (1989) Unsupervised learning. *Neural Comput* 1:295–311.
- [5] Watanabe S (1981) Pattern recognition as a quest for minimum entropy. *Pattern Recognition* 13:381–387.
- [6] Földiák (1990) Forming sparse representations by local anti-hebbian learning. *Biological Cybernetics* 64:165–170.
- [7] Olshausen B, Field D (1996) Emergence of simple-cell receptive field properties by learning a sparse code for natural images. *Nature* 381:560–561.
- [8] Földiák P (1991) Learning invariance from transformation sequences. *Neural Comput* 3:194–200.
- [9] Bialek W, Nemenman I, Tishby N (2001) Predictability, complexity, and learning. *Neural Computation* 13:2409–2463.
- [10] Becker S, Hinton GE (1992) Self-organizing neural network that discovers surfaces in random-dot stereograms. *Nature* 355:161–163.
- [11] Friedman JH, Stuetzle W, Schroeder A (1984) Projection pursuit density estimation. *Journal of the American Statistical Association* 79:599–608.
- [12] Simoncelli E, Olshausen B (2001) Natural image statistics and neural representation. *Ann Rev Neurosci* 24:1193–1216.
- [13] Zhaoping L (2006) Theoretical understanding of the early visual processes by data compression and data selection. *Network (Bristol, England)* 17:301–34. PMID: 17283516.

-
- [14] Buchsbaum G, Gottschalk A (1983) Trichromacy, opponent colours coding and optimum colour information transmission in the retina. *Proceedings of the Royal Society of London Series B, Biological Sciences* 220:89–113.
 - [15] Atick J, Redlich A (1992) What does the retina know about natural scenes. *Neural Computation* 4:196–210.
 - [16] van Hateren J (1993) Spatiotemporal contrast sensitivity of early vision. *Vision research* 33:257–67.
 - [17] Dong DW, Atick JJ (1995) Statistics of natural time-varying images. *Network: Computation in Neural Systems* 6:345–358.
 - [18] Dan Y, Atick JJ, Reid RC (1996) Efficient coding of natural scenes in the lateral geniculate nucleus: experimental test of a computational theory. *J Neurosci* 16:3351–3362.
 - [19] Hancock PJB, Baddeley RJ, Smith LS (1992) The principal components of natural images. *Network* 3:61–70.
 - [20] Li Z, Atick JJ (1994) Toward a theory of the striate cortex. *Neural Comput* 6:127–146.
 - [21] Bell A, Sejnowski T (1997) The “independent components” of natural scenes are edge filters. *Vision Res* 37:3327–38.
 - [22] Lewicki M, Olshausen B (1999) Probabilistic framework for the adaptation and comparison of image codes. *J Opt Soc Am A* 16:1587–1601.
 - [23] Wachtler T, Lee TW, Sejnowski TJ (2001) Chromatic structure of natural scenes. *Journal of the Optical Society of America A, Optics, image science, and vision* 18:65–77. PMID: 11152005.
 - [24] Lee TW, Wachtler T, Sejnowski TJ (2002) Color opponency is an efficient representation of spectral properties in natural scenes. *Vision Res* 42:2095–2103.
 - [25] Y P, Zhaoping L (2003) Local correlations, information redundancy, and the sufficient pixel depth in natural images. *Journal of Optical Society of America* 20:56–66.
 - [26] Bethge M (2006) Factorial coding of natural images: How effective are linear model in removing higher-order dependencies? *J Opt Soc Am A* 23:1253–1268.
 - [27] Perez A (1977) ε -admissible simplification of the dependence structure of a set of random variables. *Kybernetika* 13:439–44.
 - [28] Cover T, Thomas J (1991) *Elements of information theory*. New York: J. Wiley & Sons.
 - [29] Bernardo JM (1979) Expected information as expected utility. *The Annals of Statistics* 7:686–690.
 - [30] Lewicki M, Sejnowski T (2000) Learning overcomplete representations. *Neural Comput* 12:337–365.

- [31] Hulle MMV (2005) Mixture density modeling, kullback-leibler divergence, and differential log-likelihood. *Signal Processing* 85:951–963.
- [32] Nadal J, Parga N (1994) Nonlinear neurons in the low-noise limit: a factorial code maximizes information transfer. *Network: Comput Neural Syst* 5:565–581.
- [33] Bell A, Sejnowski T (1995) An information maximisation approach to blind separation and blind deconvolution. *Neural Computation* 7:1129–59.
- [34] Goyal V (2001) Theoretical Foundations of Transform Coding. *IEEE Signal Processing Magazine* 18:9–21.
- [35] Gray R (1990) *Entropy and Information Theory*. New York: Springer.
- [36] Wang Z, Bovic A, Lu L (2002) Why is image quality assessment so difficult? In: *Acoustics, Speech, and Signal Processing, 2002. Proceedings. (ICASSP '02)*. IEEE International Conference on. volume 4, pp. 3313–3316.
- [37] Gray R, Neuhoff D (1998) Quantization. *Information Theory, IEEE Transactions on* 44:2325–2383.
- [38] Gish H, Pierce JN (1968) Asymptotically efficient quantizing. *IEEE Trans Inform Theory* 14:676–683.
- [39] Fan K, Hoffman AJ (1955) Some metric inequalities in the space of matrices. *proceedings of the American Mathematical Society* 6:111–116.
- [40] Srivastava A, Lee A, Simoncelli E, Zhu S (2003) On advances in statistical modeling of natural images. *Journal of Mathematical Imaging and Vision* 18:17–33.
- [41] Hyvärinen A, Karhunen J, Oja E (2001) *Independent Component Analysis*. John Wiley & Sons.
- [42] Edelman A, Arias TA, Smith ST (1999) The geometry of algorithms with orthogonality constraints. *SIAM J Matrix Anal Appl* 20:303–353.
- [43] Press WH, Teukolsky SA, Vetterling WT, Flannery BP (1992) *Numerical Recipes in C: The Art of Scientific Computing*. New York, NY, USA: Cambridge University Press.
- [44] Maxwell JC (1855) Experiments on colour as perceived by the eye, with remarks on colour-blindness. *Transactions of the Royal Society of Edinburgh* XXI 2:275–298.
- [45] Zetzsche C, Krieger G, Wegmann B (1999) The atoms of vision: Cartesian or polar? *Journals of the Optical Society of America* 16:1554–1565.
- [46] Lyu S, Simoncelli EP (2008) Nonlinear image representation using divisive normalization. In: *Proc. Computer Vision and Pattern Recognition*. To Appear.
- [47] Brelstaff GJ, Parraga A, Troscianko T, Carr D (1995) Hyperspectral camera system: acquisition and analysis. In: Lurie BJ, Pearson JJ, Zilioli E, editors, *Proceedings of SPIE*. volume 2587, pp. 150–159. The database can be downloaded from: <http://psy223.psy.bris.ac.uk/hyper/>.

- [48] Baddeley R (1996) An effeicient code in v1. *Nature* 381:560–561.
- [49] Malsburg (1973) Self-organization of orientation sensitive cells in the striate cortex. *Biological Cybernetics* 14:85–100.
- [50] Kaschube M, Schnabel M, Loewel S, Coppola D, White LE, et al. (2006) Universal pinwheel statistics in the visual cortex. In: *Neuroscience Meeting Planner*. 545.9/T11, Atlanta, GA: Society for Neuroscience.
- [51] Wolf F (2005) Symmetry, multistability, and long-range interactions in brain development. *Physical Review Letters* 95:208701–4.
- [52] Wimbauer, Wenisch, Miller, van Hemmen (1997) Development of spatiotemporal receptive fields of simple cells: I. model formulation. *Biological Cybernetics* 77:453–461.
- [53] Horton JC, Adams DL (2005) The cortical column: a structure without a function. *Philosophical transactions of the Royal Society of London Series B, Biological sciences* 360:837–62. PMID: 15937015.
- [54] Olshausen BA, Field DJ (2005) How close are we to understanding v1? *Neural Comput* 17:1665–1699.
- [55] Masland RH, Martin PR (2007) The unsolved mystery of vision. *Current biology : CB* 17:R577–82. PMID: 17686423.
- [56] Weiss Y, Freeman W (2007) What makes a good model of natural images? *Computer Vision and Pattern Recognition, 2007 CVPR '07 IEEE Conference on* :1–8doi:10.1109/CVPR.2007.383092.
- [57] Bethge M, Berens P (2008) Near-maximum entropy models for binary neural representations of natural images. In: Platt J, Koller D, Singer Y, Roweis S, editors, *Advances in Neural Information Processing Systems 20*, Cambridge, MA: MIT Press. pp. 97–104.
- [58] Chandler DM, Field DJ (2007) Estimates of the information content and dimensionality of natural scenes from proximity distributions. *J Opt Soc Am A* 24:922–941.
- [59] Wainwright M, Simoncelli E (2000) Scale mixtures of Gaussians and the statistics of natural images. In: Solla S, Leen T, Müller KR, editors, *Adv. Neural Information Processing Systems (NIPS*99)*. Cambridge, MA: MIT Press, volume 12, pp. 855–861.
- [60] Karklin Y, Lewicki M (2003) Learning higher-order structures in natural images. *Network* 14:483–499.
- [61] Hyvärinen A, Köster U (2007) Complex cell pooling and the statistics of natural images. *Network* 18:81–100.
- [62] Osindero S, Hinton G (2008) Modeling image patches with a directed hierarchy of markov random fields. In: Platt J, Koller D, Singer Y, Roweis S, editors, *Advances in Neural Information Processing Systems 20*, Cambridge, MA: MIT Press. pp. 1121–1128.

- [63] Garrigues P, Olshausen B (2008) Learning horizontal connections in a sparse coding model of natural images. In: Platt J, Koller D, Singer Y, Roweis S, editors, *Advances in Neural Information Processing Systems 20*, Cambridge, MA: MIT Press. pp. 505–512.
- [64] Seeger MW (2008) Bayesian inference and optimal design for the sparse linear model. *Journal of Machine Learning Research* 9:759–813. URL <http://www.jmlr.org/papers/volume9/seeger08a/seeger08a.pdf>.
- [65] Guerrero-Colón JA, Simoncelli EP, Portilla J (2008) Image denoising using mixtures of Gaussian scale mixtures. In: *Proc 15th IEEE Int’l Conf on Image Proc.* San Diego, CA: IEEE Computer Society.
- [66] Hammond DK, Simoncelli EP (2008) Image modeling and denoising with orientation-adapted Gaussian scale mixtures. *IEEE Trans Image Processing* Accepted for publication.
- [67] Sinz FH, Bethge M (2008) How much can orientation selectivity and contrast gain control reduce the redundancies in natural images. Technical Report 169.
- [68] Sinz FH, Gerwinn S, Bethge M (2008) Characterization of the p-generalized normal distribution. *Journal of Multivariate Analysis* .
- [69] Hyvärinen A (1999) Survey on independent component analysis. *Neural Computing Surveys* 2:94–128.
- [70] Helmholtz H (1878) The facts of perception. In: Kahl R, editor, *Selected Writings of Hermann Helmholtz*, Middletown, CT: Wesleyan University Press.
- [71] Fleming RW, Torralba A, Adelson EH (2004) Specular reflections and the perception of shape. *J Vis* 4:798–820. URL <http://journalofvision.org/4/9/10/>. <http://journalofvision.org/4/9/10/Fleming-2004-jov-4-9-10.pdf>.